



# RS485端口大通流TSS

## High current TSS for Rs485 port

### 方案图/Solution

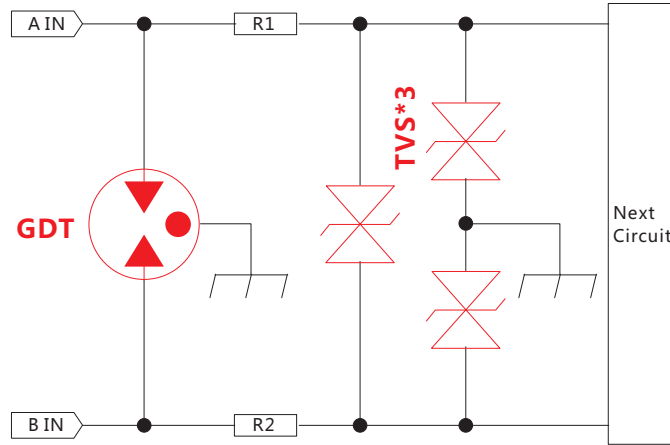

传统方案  
  
 槟城电子创新方案

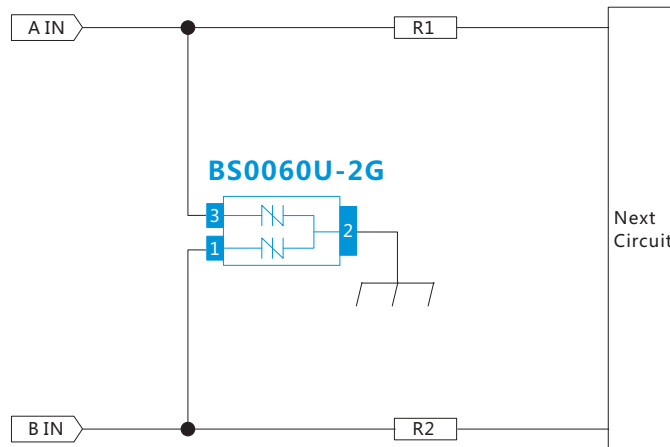

### 防护等级/Surge level

- ITU-T K56
- 8/20 $\mu$ s
- CM/DM:3KA

### 优势/Features:

- 集成度高、超小型化设计；  
High-integrated、super miniaturization.
- 应用更加简单；  
The application is much simpler.
- 相比传统方案节约70%PCB面积。  
Simple application、Save 70% of the PCB area.

### 产品参数/Datasheet

Part Number	Off state Voltage	Switching Voltage	On state Voltage	Holding Current	Capacitance	Surge Waveform	Surge Peak	Package	Size
	$V_{DRM}$ (V)	$V_s$ (V) Max	$V_r$ (V) Max						
BS0060U-2G	6 (Pin1,3-2)	25 800 (Pin1,3-2)	4 2.2	$\geq 50$	500	8/20	3KA	SMC-T	8.0x5.9x2.0